



# INSTALLATION INSTRUCTIONS

Tech Support  
856-768-5700 EXT 2  
TechSupport@LEDGlow.com


## Motorcycle LED Lighting Kit 4 Button Wireless Remote Programming

PLEASE READ THE FOLLOWING INSTRUCTIONS THOROUGHLY BEFORE PROGRAMMING THE 4 BUTTON WIRELESS REMOTE.

**Note:** The following programming process can be viewed at: [www.YouTube.com/LEDGlow](http://www.YouTube.com/LEDGlow)

### 4 Button Wireless Remote Programming:

1. Disconnect the wire harness that connects your motorcycle LED lighting strips to the control box, but keep the control box connected to your power source.
2. After the wire harness is disconnected from the control box, remove the end cap with the lead wires to slide the circuit board out of the control box housing.
3. Remove the tape from around the circuit board. Once you have removed the tape from the circuit board, you need to determine if you have control box "A" or "B".
4. Identifying Control Box "A" or "B"
  - Control Box "A" will have a white box located in the middle of the circuit board that has two silver tabs above and below the word "key".
  - Control Box "B" will have a white box located at the bottom right of the circuit board that has two silver tabs under the word "K1".
5. Programming Control Box "A"
  - Using a flat head screw driver, simultaneously touch both silver tabs located below the word "key" until the LED next to it illuminates.
  - Once the LED is illuminated, press any button on the new 4 button wireless remote. The LED will flash and then turn off.
  - Now press the "D" button on the remote to test for full functionality.
  - Cover the circuit board with the tape you removed in Step 3 and slide the circuit board back into the control box housing.
6. Programming Control Box "B"
  - Using a flat head screw driver, touch both silver tabs located below "K1" at the same time until the LED next to it illuminates.
  - Once the LED is illuminated, press any button on the new 4 button wireless remote. The LED will flash and then turn off.
  - Now press the "D" button on the remote to test for full functionality.
  - Cover the circuit board with the tape you removed in Step 3 and slide the circuit board back into the control box housing.
7. Once you have programmed your new wireless remote, you can now reconnect the wire harness to the control box.

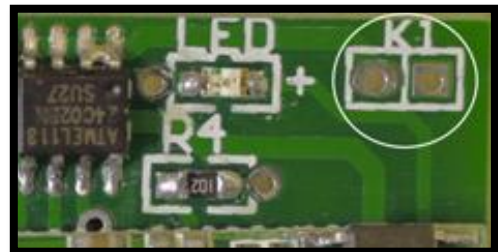

For accessories, replacement parts and/or technical support, please visit [www.LEDGlow.com](http://www.LEDGlow.com) for more information.

Effective 12/03/2013

For Full Warranty Information Visit [www.LEDGlow.com](http://www.LEDGlow.com)